


TECHNICAL DATA SHEET


ND X20 Drainage System

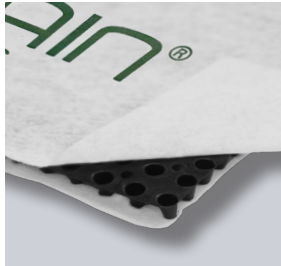

ND X20 Drainage System

High-performance CE-marked drainage system with an innovative dimple design made out of recycled high impact polystyrene and a construction height of approx. 20 mm. The core of the ND Drainage System is a perforated, vapour-permeable dimpled sheet with a high compressive strength, an excellent creep resistance guaranteeing a consistent long term drainage capacity. The ND X20 Drainage System has a water buffering capacity of approx. 4.3 l/m².

A non-woven geotextile is glued to the back of the dimpled sheet as a filter layer and a vapour-permeable geotextile is bonded to each dimple as a protection and separation layer. Both geotextiles have an overlap of approx. 10 cm. The geotextiles are glued and not thermally bonded to the dimpled core to avoid damage to the mechanical and hydraulic properties of the geotextile and the drainage system. It also prevents the geotextile to be pushed in between the dimples obstructing the drainage capacity.

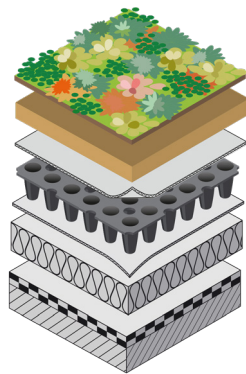


Composition Nophadrain Extensive Green Roof System - inverted roof construction with ND X20 Drainage System

Applications

The ND X20 Drainage System is a component of the Nophadrain Extensive Green Roof System that acts as a filter, drainage and protection layer. The construction height (approx. 20 mm) prevents waterlogging in the substrate layer and the risk of frost heave affecting the paving and allows longer drainage length. The ND X20 Drainage System is suitable for warm roof and inverted roof constructions until 15 °.

Properties

- Material dimpled sheet: recycled high impact polystyrene (HIPS)
- Material geotextile filter: polypropylene (PP)
- Material vapour-permeable geotextile: polypropylene (PP)
- Geotextile overlap (upper side and bottom side): 100 mm
- Construction height: approx. 20 mm
- Compressive strength: approx. 270 kPa
- Perforations/m²: approx. 1,540 / ø 6.3 mm
- Water reservoir: approx. 4.3 l/m²
- Weight: approx. 942 g/m²
- Drainage capacity at i = 1 at 20 kPa: approx. 7.30 l/[s.m]
- Drainage capacity at fall ratio 2 % at 20 kPa: approx. 0.80 l/[s.m]



Composition Nophadrain Extensive Green Roof System - pitched roof (max 15 °) with ND X20 Drainage System

Product	Dimensions (L x W)	Packaging
ND X20 Drainage System	approx. 30 x 1.20 m	approx. 36 m ² , Roll

NOPHADRAIN®
SMART GREEN ROOF SYSTEMS

Nophadrain BV

Mercuriusstraat 10
6468 ER Kerkrade
The Netherlands

+31 (0)45 535 50 30
info@nophadrain.com

www.nophadrain.com

Data sheet
DoPX20-001
ND X20

Material Properties	Standard	Unit	Performance
Core	-	-	HIPS
Filter geotextile	-	-	PP
Separation film	-	-	-
Separation geotextile	-	-	PP
Mechanical Properties (mean values)			
Compressive strength	hEN ISO 25619-2	kPa	270
Compressive strength at 10 % deformation	hEN ISO 25619-2	kPa	240
Deformation at 1 mPa	hEN ISO 25619-2	%	-
Tensile strength ¹ (MD/CMD) ²	hEN ISO 10319	kN/m	7/8.5
CBR puncture resistance ¹	hEN ISO 12236	kN	1.15
Dynamic performance (cone drop)	hEN ISO 13433	mm	34
Resistance to weathering ³	hEN ISO 12224	%	60/80
Physical Properties			
Construction height at 2 kPa	-	mm	approx. 20
Dimple height at 2 kPa	-	mm	approx. 18.5
Perforations per m ²	-	-	1,540
Diameter perforations	-	mm	6.3
Water reservoir	-	l/m ²	4.3
Material dimensions (L x W)	-	m	30 x 1.2
Mass per unit area	-	g	942
Surface area per roll	-	m ²	36
Roll diameter	-	cm	85
Roll weight	-	kg	34
Hydraulic Properties (mean values)			
Opening size O ₉₀ ¹	hEN ISO 12956	µm	100
Water permeability H ₅₀ ¹	hEN ISO 11058	mm/s	110
Drainage Capacity (mean values)			
Vertical drainage / Wall - gradient i=1			
Surface load	Build-in-depth		
20 kPa	2.0 m	hEN ISO 12958 ⁴	l/(s.m) 7.30
30 kPa	3.0 m	hEN ISO 12958 ⁴	l/(s.m) 7.00
50 kPa	5.0 m	hEN ISO 12958 ⁴	l/(s.m) 6.63
100 kPa	10.0 m	hEN ISO 12958 ⁴	l/(s.m) 5.90
200 kPa	Exceptional	hEN ISO 12958 ⁴	l/(s.m) 5.31
Horizontal drainage / Roof			
Fall = 0 % - Exceptional case			
≤ 2 kPa - extensive green roof		FH Karlsruhe (D) ⁵	l/(s.m) -
≤ 10 kPa - intensive green roof		FH Karlsruhe (D) ⁵	l/(s.m) -
Fall = 1 % - Exceptional case			
≤ 10 kPa - extensive green roof		hEN ISO 12958 ⁴	l/(s.m) 0.50
≤ 20 kPa - intensive green roof		hEN ISO 12958 ⁴	l/(s.m) 0.40
100 kPa - podium roof deck		hEN ISO 12958 ⁴	l/(s.m) 0.42
200 kPa - parking roof deck		hEN ISO 12958 ⁴	l/(s.m) 0.33
Fall = 1.5 %			
≤ 10 kPa - extensive green roof		hEN ISO 12958 ⁴	l/(s.m) 0.70
≤ 20 kPa - intensive green roof		hEN ISO 12958 ⁴	l/(s.m) 0.73
100 kPa - podium roof deck		hEN ISO 12958 ⁴	l/(s.m) 0.60
200 kPa - parking roof deck		hEN ISO 12958 ⁴	l/(s.m) 0.40
Fall = 2 %			
≤ 10 kPa - extensive green roof		hEN ISO 12958 ⁴	l/(s.m) 0.92
≤ 20 kPa - intensive green roof		hEN ISO 12958 ⁴	l/(s.m) 0.80
100 kPa - podium roof deck		hEN ISO 12958 ⁴	l/(s.m) 0.82
200 kPa - parking roof deck		hEN ISO 12958 ⁴	l/(s.m) 0.50
Fall = 2.5 %			
≤ 10 kPa - extensive green roof		hEN ISO 12958 ⁴	l/(s.m) 1.00
≤ 20 kPa - intensive green roof		hEN ISO 12958 ⁴	l/(s.m) 0.90
100 kPa - podium roof deck		hEN ISO 12958 ⁴	l/(s.m) 0.81
200 kPa - parking roof deck		hEN ISO 12958 ⁴	l/(s.m) 0.63
Fall = 3 %			
≤ 10 kPa - extensive green roof		hEN ISO 12958 ⁴	l/(s.m) 1.22
≤ 20 kPa - intensive green roof		hEN ISO 12958 ⁴	l/(s.m) 1.13
100 kPa - podium roof deck		hEN ISO 12958 ⁴	l/(s.m) 0.80
200 kPa - parking roof deck		hEN ISO 12958 ⁴	l/(s.m) 0.72

¹ Performance expressed on the filter/geotextile only

² MD = Machine direction / CMD = Cross Machine Direction

³ Material has to be completely covered within 14 days after installation

⁴ hEN ISO 12958 tested hard/soft

⁵ FH Karlsruhe (D) tested hard/hard

The values correspond to average results obtained in our laboratories and outside institutes and are indicative. The right is reserved to make changes at any time without notice. Standard variations in mechanical properties of 15 % and in hydraulic properties of 20 % and in physical properties of 5 % are normal.

Nophadrain BV excludes any liability for errors, omissions or otherwise arising from the contents of this document. The reader must satisfy himself or herself as to the principles and practices described in this document in relation to any particular application and take appropriate, independent, professional advice.
V05.2021